


Surface Mount MLC Capacitors



Standard MLCC Ranges

A range of dc rated multi-layer chip capacitors from 0.2pF to $1.0\mu F$ and in case sizes 0402 to 8060 in C0G/NP0 dielectric. Suitable for all general purpose and high reliability applications where package size and reliability are important. All parts can incorporate either base metal or precious metal electrodes as an option.



Electrical Details											
Capacitance Range		0.2pF to 1.0μF									
Temperature Coefficient of Capacitance (TCC)	C0G/NP0	0 ± 30ppm/°C									
Dissipation Factor	C0G/NP0	Cr > 50pF ≤0.0015 Cr ≤ 50pF = 0.0015(15÷Cr+0.7)									
	Low Loss	≤ 0.001									
Insulation Resistance (IR)		100G Ω or 1000secs (whichever is the less)									
Dielectric Withstand Voltage (DWV)	Voltage applied for 5 ±1 seconds, 50mA charging current maximum									
Ageing Rate	C0G/NP0	Zero									

Range Dimensions - Standard MLCC Ranges

Size	Length Width (L1) (W) mm/inches mm/inches		Max. Thickness (T) mm/inches	Termination Band (L2) mm/inches min max				
0402	1.0 ± 0.10	0.50 ± 0.10	0.6	0.10	0.40			
0402	0.04 ± 0.004	0.02 ± 0.004	0.024	0.004	0.016			
0603	1.6 ± 0.15 0.063 ± 0.006	0.8 ± 0.15 0.032 ± 0.006	0.9 0.035	0.20 0.008	0.40 0.016			
0805	2.0 ± 0.2 0.079 ± 0.008	1.25 ± 0.2 0.049 ± 0.008	1.3 0.051	0.25 0.010	0.75 0.03			
1206	3.2 ± 0.2 0.126 ± 0.008	1.6 ± 0.2 0.063 ± 0.008	1.9 0.075	0.25 0.01	0.75 0.03			
1210	3.2 ± 0.2 0.126 ± 0.008	2.5 ± 0.2 0.098 ± 0.008	2.8 0.110	0.25 0.01	0.75 0.03			
1210 (VM2)	3.2 + 0.5 / - 0.2 0.126 + 0.02 / - 0.008	2.6 ± 0.3 0.102 ± 0.012	6.0 0.236	0.25 0.01	0.75 0.03			
1808	4.5 ± 0.35 0.180 ± 0.014	2.0 ± 0.3 0.08 ± 0.012	2.0 0.08	0.25 0.01	1.0 0.04			
1812	4.5 ± 0.30 0.180 ± 0.012	3.2 ± 0.2 0.126 ± 0.008	3.2 0.126	0.25 0.01	1.14 0.045			
1825	4.5 ± 0.30 0.180 ± 0.012	6.40 ± 0.4 0.252 ± 0.016	4.0 0.158	0.25 0.01	1.0 0.04			
2220	5.7 ± 0.40 0.225 ± 0.016	5.0 ± 0.4 0.197 ± 0.016	4.0 0.158	0.25 0.01	1.0 0.04			
2225	5.7 ± 0.4 0.225 ± 0.016	6.3 ± 0.4 0.25 ± 0.016	4.0 0.158	0.25 0.01	1.14 0.045			
3640	9.2 ± 0.5 0.36 ± 0.02	10.16 ± 0.5 0.4 ± 0.02	4.0 0.158	0.5 0.02	1.5 0.06			
5550	14.0 ± 0.711 0.55 ± 0.028	12.7 ± 0.635 0.5 ± 0.025	4.0 0.158	0.5 0.02	1.5 0.06			
8060	20.3 ± 0.5 0.8 ± 0.02	15.24 ± 0.5 0.6 ± 0.02	4.0 0.158	0.5 0.02	1.5 0.06			

Custom chip sizes not included in the table, but larger than 2225, can be considered with minimum tooling charges. Please refer specific requests direct to the sales office.

Max thickness relates to standard components and actual thickness may be considerably less. Thicker parts, or components with reduced maximum thickness, can be considered by request – please refer requests to the sales office.

Ordering Information - Standard MLCC Range

1210	Υ	100	0103	J	С	T	
Chip Size	Termination	Voltage d.c. (marking code)	Capacitance in Pico farads (pF)	Capacitance Tolerance	Dielectric Codes	Packaging	Suffix Code
0402 0603 0805 1206 1210 1808 1812 1825 2220 2225 3640 5550 8060	Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. H = FlexiCap™ termination base with nickel barrier (tin/lead plating with min. 10% lead). Not RoHS compliant. F = Silver Palladium. RoHS compliant J = Silver base with nickel barrier (100% matte tin plating). RoHS compliant A = Silver base with nickel barrier (tin/lead plating with min. 10% lead). Not RoHS compliant 6 = Nickel Barrier, Sn/Pb Plated Solder (5-20% Lead, non RoHS) 7 = FlexiCap™ Polymer termination, Nickel barrier, Sn/Pb Plated Solder (5-20% Lead, non RoHS)	010 = 10V 016 = 16V 025 = 25V 050 = 50V 063 = 63V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K2 = 1.2kV 2K5 = 2.5kV 3K0 = 3kV 4K0 = 4kV 5K0 = 5kV 6K0 = 6kV 8K0 = 8kV 10K = 10kV 12K = 12kV	<1.0pF Insert a P for the decimal point as the first character. e.g., P300 = 0.3pF Values in 0.1pF steps ≥1.0pF & <10pF Insert a P for the decimal point as the second character. e.g., 8P20 = 8.2pF Values are E24 series ≥10pF First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. e.g., 0101 = 100 pF Values are E12 series	H: \pm 0.05pF (only available for values <4.7pF) <10pF B: \pm 0.10pF C: \pm 0.25pF D: \pm 0.5pF F: \pm 1.0pF ≥10pF F: \pm 1% G: \pm 2% J: \pm 5% K: \pm 10% M: \pm 20%	C = COG/NPO (1B)	T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack - tubs or trays	Used for specific customer requirements & variants M01 = Open Mode E01, E07 = 3 terminal EMI component E03 = X2Y Integrated pass component VM2 = Extra thick



Web www.knowlescapacitors.com © Knowles 2025 StandardC0GMLCCDatasheet Issue 2 (18/06/2025)

Minimum/Maximum Capacitance Values

Note: Knowles Precision Devices operate a continuous improvement process with ranges being expanded and updated regularly. The latest range may differ. Please contact the local sales office or refer to the KPD website – www.knowlescapacitors.com

These values are guidelines only. Please contact your local sales office to discuss your specific requirements.

Chip Size	Dielectric	0402	0603	0805	1206	1210	1210(VM2)	1808	1812	1825	2220*	2225*	3640	5550	8060
Min. value		0.2pF	0.5pF	1.0pF	1.0pF	3.9pF	-	4.7pF	5.6pF	10pF	10pF	10pF	10pF	27pF	47pF
10Vdc	Standard	-	3.3nF	15nF	39nF	68nF	-	68nF	220nF	470nF	470nF	560nF	330nF	-	-
16Vdc	Standard	-	2.7nF	12nF	33nF	68nF	-	68nF	180nF	330nF	330nF	470nF	330nF	-	-
25Vdc	Standard	220pF	2.2nF	10nF	27nF	47nF	-	47nF	150nF	220nF	220nF	330nF	330nF	-	-
50Vdc	Standard	220pF	1.5nF	5.6nF	22nF	33nF	-	33nF	100nF	150nF	150nF	220nF	330nF	680nF	1.0µF
63Vdc	Standard	220pF	1.5nF	5.6nF	18nF	33nF	-	33nF	100nF	150nF	150nF	220nF	330nF	680nF	1.0µF
1001/4-	Standard	100pF	470pF	2.2nF	8.2nF	18nF	-	18nF	47nF	68nF	68nF	82nF	270nF	470nF	680nF
100Vdc	Low Loss	-	-	-	10nF	33nF	-	-	-	-	-	-	-	-	-
20074-	Standard	33pF	220pF	1.5nF	3.9nF	8.2nF	-	8.2nF	27nF	47nF	56nF	68nF	180nF	330nF	560nF
200Vdc	Low Loss	-	-	-	10nF	33nF	-	-	33nF	-	-	-	-	-	-
25074-	Standard	33pF	220pF	1.0nF	3.9nF	8.2nF	-	8.2nF	27nF	47nF	56nF	68nF	180nF	330nF	560nF
250Vdc	Low Loss	-	-	-	10nF	33nF	-	-	33nF	-	-	-	-	-	-
F001/4-	Standard	-	150pF	22nF	3.3nF	6.8nF	-	6.8nF	22nF	33nF	39nF	47nF	120nF	270nF	470nF
500Vdc	Low Loss	-	-	-	10nF	33nF	39nF to 66nF	-	33nF	-	-	-	-	-	-
62014-	Standard	-	-	820pF	2.7nF	6.8nF	-	6.8nF	22nF	33nF	39nF	39nF	100nF	180nF	390nF
630Vdc	Low Loss				10nF	33nF	39nF to 66nF	-	33nF	-	-	-	-	-	-
100011-	Standard	-	-	330pF	2.2nF	3.9nF	-	3.9nF	10nF	22nF	22nF	27nF	82nF	150nF	270nF
1000Vdc	Low Loss	-	-	-	6.8nF	22nF	27nF to 44nF	-	-	-	-	-	-	-	-
1200Vdc	Standard	-	-	180pF	820pF	1.8nF	-	2.2nF	8.2nF	18nF	22nF	27nF	56nF	100nF	180nF
1200Vac	Low Loss	-	-	-	-	12nF	-	-	-	-	-	-	-	-	-
1500Vdc	Standard	-	-	150pF	560pF	1.2nF	-	1.5nF	6.8nF	12nF	15nF	18nF	39nF	68nF	120nF
2000Vdc	Standard	-	-	100pF	390pF	560pF	-	1.0nF	3.3nF	5.6nF	6.8nF	8.2nF	18nF	39nF	68nF
2500Vdc	Standard	-	-	-	150pF	330pF	-	390pF	1.5nF	3.3nF	3.9nF	4.7nF	12nF	22nF	39nF
3000Vdc	Standard	-	-	-	100pF	220pF	-	270pF	1.0nF	2.2nF	3.3nF	3.9nF	8.2nF	18nF	27nF
4000Vdc	Standard	-	-	-	-	-	-	150pF	680pF	1.5nF	1.8nF	1.8nF	3.3nF	15nF	15nF
5000Vdc	Standard	-	-	-	-	-	-	82pF	330pF	820pF	1.0nF	1.2nF	2.2nF	4.7nF	10nF
6000Vdc	Standard	-	-	-	-	-	-	47pF	220pF	330pF	560pF	680pF	1.5nF	3.3nF	6.8nF
8000Vdc	Standard	-	-	-	-	-	-	-	-	-	-	-	150pF	330pF	680pF
10000Vdc	Standard	-	-	-	-	-	-	-	-	-	-	-	100pF	180pF	470pF
12000Vdc	Standard	-	-	-	-	-	-	-	-	-	-	-	68pF	120pF	220pF

^{*}Leaded options are available on all parts in case sizes 2220 and 2225. Please see below for more information.



Web www.knowlescapacitors.com © Knowles 2025 StandardC0GMLCCDatasheet Issue 2 (18/06/2025)

Performance and Testing

Performance and Testing						
		c	OG/NPO/X8G			
			Ultra stable			
IECQ-CECC	1B/CG	-	-			
EIA	-	C0G/NP0	-			
MIL	-	-	CG (BP)			
Rated temperature range		-5	55°C to +125°C			
Maximum capacitance change over temperature range		(0 ± 30 ppm/°C			
Rated DC voltage applied						
Knowles / Syfer dielectric ordering code			С			
Tangent of loss angle (tan δ)		Cr ≤ 50pF	> 50pF ≤ 0.0015 F = 0.0015(15÷Cr+0.7) w Loss ≤ 0.001			
Insulation resistance (Ri) OR Time constant (Ri*Cr) (whichever is the least)	100G Ω or 1000s					
	Cr <4.7pF		± 0.05pF (H) ± 0.10pF (B) ± 0.25pF (C) ± 0.50pF (D)			
Capacitance tolerance (ordering code)	Cr <10pF	± 0.10pF (B) ± 0.25pF (C) ± 0.50pF (D)				
	± 1% (F) ± 2% (G) ± 5% (J) ± 10% (K)					
Dielectric strength	Voltage ap		econds max. Charging current limited 50mA maximum.			
<200V >200V to <500V 500V to <1000V >1kV to <1200V >1000V >1200V	2.5 times Rated voltage + 250V 1.5 times 1.25 times - 1.2 times					
Clin	natic catego	ry (IEC)				
Chip			55/125/56			
Ageing characteristic (Tyical)			Zero			



 Web
 www.knowlescapacitors.com
 © Knowles 2025
 StandardC0GMLCCDatasheet
 Issue 2 (18/06/2025)

Soldering Information

Knowles MLCCs are compatible with all recognised soldering/mounting methods for chip capacitors. A detailed application note is available at syfer.com

Reflow Soldering

Knowles recommend reflow soldering as the preferred method for mounting MLCCs. Knowles MLCCs can be reflow soldered using a reflow profile generally defined in IPC/FEDEC J-STD-020. Sn plated termination chip capacitors are compatible with both conventional and lead free soldering with peak temperatures of 260 to 270°C acceptable.

The heating ramp rate should be such that components see a temperature rise of 1.5 to 4°C per second to maintain temperature uniformity through the MLCC.

The time for which the solder is molten should be maintained at a minimum, so as to prevent solder leaching. Extended times above 230°C can cause problems with oxidation of Sn plating. Use of an inert atmosphere can help if this problem is encountered. Palladium/Silver (Pd/Ag) terminations can be particularly susceptible to leaching with free lead, tin rich solders and trials are recommended for this combination.

Cooling to ambient temperature should be allowed to occur naturally, particularly if larger chip sizes are being soldered. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Forced cooling should be avoided as this can induce thermal breakage.

Wave Soldering

Wave soldering is generally acceptable, but the thermal stresses caused by the wave have been shown to lead to potential problems with larger or thicker chips. Particular care should be taken when soldering SM chips larger than size 1210 and with a thickness greater than 1.0mm for this reason.

Maximum permissible wave temperature is 270°C for SM chips.

The total immersion time in solder should be kept to a minimum. It is strongly recommended that Sn/Ni plated terminations are specified for wave soldering applications.

Solder Leaching

Leaching is the term for the dissolution of silver into the solder causing a failure of the termination system which causes increased ESR, tan δ and open circuit faults, including ultimately the possibility of the chip becoming detached.

Leaching occurs more readily with higher temperature solders and solders with a high tin content. Pb free solders can be very prone to leaching certain termination systems. To prevent leaching, exercise care when choosing solder allows and minimize both maximum temperature and dwell time with the molten solder.

Plated terminations with nickel or copper anti-leaching barrier layers are available in a range of top coat finishes to prevent leaching occurring. These finishes also include Knowles $FlexiCap^{TM}$ for improved stress resistance post soldering.


Reflow Soldering for Leaded Parts


Reflow solder in accordance with IPC-A-610. Recommended reflow profile as laid down in IPC/JEDEC J-STD-020.

Wave soldering not possible for Tab leaded stand-offparts.


Peak re-flow temperature (Tp) 250°C. Solder volume should be calculated such that the meniscus between tab and board remains under the 'cut-out' guidance edge on the tab (see diagram). Excessive solder or heat may reflow the solder between the lead and MLCC, impacting the integrity of the joint

Hand soldering of Tab leaded parts is not recommended.





Multilayer ceramic chip with nickel or copper barrier termination



Rework of Chip Capacitors

Knowles recommend hot air/gas as the preferred method of applying heat for rework. Apply even heat surrounding the component to minimise internal thermal gradients. Soldering irons or other techniques that apply direct heat to the chip or surrounding area should not be used as these can result in micro cracks being generated.

Minimise the rework heat duration and allow components to cool naturally after soldering.

Use of Silver Loaded Epoxy Adhesives

Chip capacitors can be mounted to circuit boards using silver loaded adhesive provided the termination material of the capacitor is selected to be compatible with the adhesive. This is normally PdAg. Standard tin finishes are often not recommended for use with silver loaded epoxies as there can be electrical and mechanical issues with the joint integrity due to material mismatch.

Handling & Storage

Components should never be handled with fingers; perspiration and skin oils can inhibit solderability and will aggravate cleaning.

Chip capacitors should never be handled with metallic instruments. Metal tweezers should never be used as these can chip the product and leave abraded metal tracks on the product surface. Plastic or plastic coated metal types are readily available and recommended – these should be used with an absolute minimum of applied pressure.

Incorrect storage can lead to problems for the user. Rapid tarnishing of the terminations, with an associated degradation of solderability, will occur if the product comes into contact with industrial gases such as sulphur dioxide and chlorine. Storage in free air, particularly moist or polluted air, can result in termination oxidation.

Packaging should not be opened until the MLCs are required for use. If opened, the pack should be re-sealed as soon as practicable. Alternatively, the contents could be kept in a sealed container with an environmental control agent.

Long term storage conditions, ideally, should be temperature controlled between -5 and +40 $^{\circ}$ C and humidity controlled between 40% and 60% R.H.

Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesive performance.

Product, stored under the conditions recommended above, in its "as received" packaging, has a minimum shelf life of 2 years.

SM Pad Design

Knowles conventional 2-terminal chip capacitors can generally be mounted using pad designs in accordance with IPC-7351, Generic Requirements for Surface Mount Design and Land Pattern Standards, but there are some other factors that have been shown to reduce mechanical stress, such as reducing the pad width to less than the chip width. In addition, the position of the chip on the board should also be considered.

3-terminal components are not specifically covered by IPC-7351, but recommended pad dimensions are included in the Knowles catalogue/website for these components.



Web www.knowlescapacitors.com © Knowles 2025 StandardC0GMLCCDatasheet Issue 2 (18/06/2025)


FlexiCap[™] Termination

FlexiCap $^{\text{TM}}$ has been developed as a result of listening to customer's experiences of stress damage to MLCCs from many manufacturers, often caused by variations in production processes.

Our answer is a proprietary flexible epoxy polymer termination material that is applied to the device under the usual nickel barrier finish. FlexiCap $^{\text{TM}}$ will accommodate a greater degree of board bending than conventional capacitors.

Ranges are available with FlexiCap[™] termination material offering increased reliability and superior mechanical performance (board flex and temperature cycling) when compared with standard termination materials. Refer to Knowles application note reference AN0001. FlexiCap[™] capacitors enable the board to be bent almost twice as much as before mechanical cracking occurs. Refer to application note AN0002.

FlexiCap $^{\text{TM}}$ is also suitable for space applications having passed thermal vacuum outgassing tests. Refer to Knowles application note reference AN0026.



FlexiCap™ MLCC cross section

Knowles has delivered millions of FlexiCap $^{\text{TM}}$ components and during that time has collected substantial test and reliability data, working in partnership with customers world wide, to eliminate mechanical cracking.

An additional benefit of FlexiCap $^{\text{TM}}$ is that MLCCs can withstand temperature cycling from -55 to 125 $^{\circ}$ C in excess of 1,000 times without cracking.

FlexiCap $^{\text{TM}}$ termination has no adverse effect on any electrical parameters, nor affects the operation of the MLCC in any way.

Application Notes

FlexiCapTM may be handled, stored and transported in the same manner as standard terminated capacitors. The requirements for mounting and soldering FlexiCapTM are the same as for standard SMD capacitors.

For customers currently using standard terminated capacitors there should be no requirement to change the assembly process when converting to $FlexiCap^{TM}$.

Based upon the board bend tests in accordance with IEC 60384-1 the amount of board bending required to mechanically crack a FlexiCap $^{\text{TM}}$ terminated capacitor is significantly increased compared with standard terminated capacitors.

Product: X7R	Typical bend performance under AEC-Q200 test conditions
Standard Termination	2mm to 3mm
FlexiCap™	Typically 8mm to 10mm

REACH (Registration, Evaluation, Authorisation and restriction of Chemicals) Statement

The main purpose of REACH is to improve the protection of human health and the environment from the risks arising from the use of chemicals.

Knowles Precision devices maintains both ISO 14001, Environmental Management System and OHSAS 18001 Health & Safety Management System approvals that require and ensure compliance with corresponding legislation such as REACH.

For further information, please contact the sales office at SyferSales@knowles.com

RoHS Compliance

Knowles routinely monitors world wide material restrictions (e.g., EU/China and Korea RoHS mandates) and is actively involved in shaping future legislation.

All standard COG/NPO, X7R, X5R and High Q Knowles MLCC products are compliant with the EU RoHS directive (see below for special exemptions) and those with plated terminations are suitable for soldering common lead free solder alloys (refer to 'Soldering Information' for more details on soldering limitations). Compliance with EU RoHS directive automatically signifies compliance with some other legislation (e.g., Korea RoHS). Please refer to the Sales Office for details of compliance with other materials legislation.

Breakdown of material content, SGS analysis reports and tin whisker test results are available on request.

Most Knowles MLCC components are available with non-RoHS compliant tin/lead (SnPb) Solderable termination finish for exempt applications and where pure tin is not acceptable. Other tin free termination finishes may also be available – please refer to the Sales Office for further details.

X8R ranges <250Vdc are not RoHS 2011/65/EU compliant.

115Vac 400Hz ranges are not RoHS 2011/65/EU compliant.

Check the website, www.knowlescapacitors.com for latest RoHS update.

Export Controls and Dual-use Regulations

Certain Knowles catalogue components are defined as 'dualuse' items under international export controls – those that can be used for civil and military purposes which meet certain specified technical standards.

The defining criteria for a dual-use component with respect to Knowles products is one with a voltage rating of >750V and a capacitance value >250nF and a series inductance <10nH.

Components defined as 'dual-use' under the above criteria automatically require a licence for export outside the EU, and may require a licence for export with the EU.

The application for a licence is routine, but customers for these products will be asked to supply further information.

Please refer to the sales office if you require any further information on export restrictions.

Other special components may additionally need to comply with export regulations.



 Web www.knowlescapacitors.com
 © Knowles 2025
 StandardC0GMLCCDatasheet
 Issue 2 (18/06/2025)

Ageing of Ceramic Capacitors

Capacitor ageing is a term used to describe the negative, logarithmic capacitance change which takes place in ceramic capacitors with time. The crystalline structure for barium titanate based ceramics changes on passing through its Curie temperature (known as the Curie Point) at about 125°C. The domain structure relaxes with time and in doing so, the dielectric constant reduces logarithmically; this is known as the ageing mechanism of the dielectric constant. The more stable dielectrics have the lowest ageing rates.

The ageing process is reversible and repeatable. Whenever the capacitor is heated to a temperature above the Curie Point the ageing process starts again from zero.

The ageing constant, or ageing rate, is defined as the percentage loss of capacitance due to the ageing process of the dielectric which occurs during a decade of time (a tenfold increase in age) and is expressed as percent per logarithmic decade of hours. As the law of decrease of capacitance is logarithmic, this means that for a capacitor with an ageing rate of 1% per decade of time, the capacitance will decrease at a rate of:

- a) 1% between 1 and 10 hours
- An additional 1% between the following 10 and 100 hours
- An additional 1% between the following 100 and 1000 hours
- An additional 1% between the following 1000 and 10000 hours
- The ageing rate continues in this manner throughout the capacitor's life.

Typical values of the ageing constant for our MLCCs are

Dielectric Class	Typical Values
Ultra Stable COG/NPO	Negligible capacitance loss through ageing

Capacitance Measurements


Because of ageing it is necessary to specify an age for reference measurements at which the capacitance shall be within the prescribed tolerance. This is fixed at 1000 hours, since for all practical purposes there is not much further loss of capacitance after this time.

All capacitors shipped are within their specified tolerance at the standard reference age of 1000 hours after having cooled through their Curie temperature.

The ageing curve for any ceramic dielectric is a straight line when plotted on semi-log paper.

Capacitance vs. Time

(Ageing X7R @ 1% per decade)



Tight Tolerance

One of the advantages of Knowles's unique 'wet process' of manufacture is the ability to offer capacitors with exceptionally tight capacitance tolerances.

The accuracy of the printing screens used in the fully automated, computer controlled manufacturing process allows for tolerance as close as \pm 1% on COG/NPO parts greater than or equal to 10pF. For capacitance value less than 4.7pF tolerances can be as tight as \pm 0.05pF.

Periodic Tests Conducted and Reliability Data

For standard surface mount capacitors components are randomly selected on a sample basis and the following routine tests conducted:

- Load Test. 1,000 hours @ 125°C (150°C for X8R).
 Applied voltage depends on components tested
- Humidity Test. 168 hours @ 85°C/85%RH
- Board Deflection (bend test)

Test results are available on request.


Conversion Factors

From	То	Operation
FITs	MTBF (hours)	10° ÷ FITs
FITs	MTBF (years)	10° ÷ (FITs × 8760)

FIT = Failures In Time. 1 FIT = 1 failure in 10⁹ hours

MTBF = Mean Time Between Failure

Example of FIT Data Available



Component type: 0805 (C0G/NP0 and X7R)

Testing Location: Knowles reliability test department Results based on: 16,622,000 component test hours




Web www.knowlescapacitors.com © Knowles 2025 StandardC0GMLCCDatasheet Issue 2 (18/06/2025)

Email Europe: KPD-Europe-sales@knowles.com | Asia: KPD-Asia-sales@knowles.com | USA: KPD-NA-sales@knowles.com

Page 6 of 8

Packaging Information


Tape and reel packing of surface mounting chip capacitors for automatic placement are in accordance with IEC60286-3.



Peel Force


The peel force of the top sealing tape is between 0.2 and 1.0 Newton at 180° . The breaking force of the carrier and sealing tape in the direction of unreeling is greater than 10 Newton.

Reel Dimensions



Symbol	Description	178mm Reel	330mm Reel
A	Reel diameter	178 (7)	330 (13)
G	Reel inside width	8.4 (0.33)	12.4 (0.49)
т	Reel outside width	14.4 (0.56) max	18.4 (0.72) max

Tape Dimensions

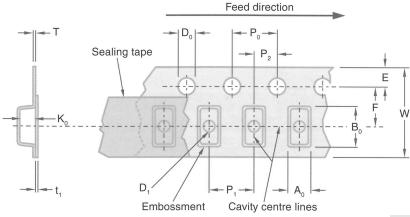

	Embossinent Cavity centre lines						
		Dimensions	mm (inches)				
Symbol	Description	8mm Tape	12mm Tape				
A ₀ B ₀ K ₀	Width of cavity Length of cavity Depth of cavity	Dependent on chip siz	e to minimize rotation				
W	Width of tape	8.0 (0.315)	12.0 (0.472)				
F	Distance between drive hole centres and cavity centres	3.5 (0.138)	5.5 (0.213)				
Е	Distance between drive hole centres and tape edge	1.75 (0.069)					
P ₁	Distance between cavity centres	4.0 (0.156) 8.0 (0.315)					
P ₂	Axial distance between drive hole centres and cavity centres	2.0 (0	0.079)				
P ₀	Axial distance between drive hole centres	4.0 (0).156)				
D ₀	Drive hole diameter	1.5 (0.059)					
D ₁	Diameter of cavity piercing	1.0 (0.039) 1.5 (0.059)					
Т	Carrier tape thickness	0.3 (0.012) ±0.1 (0.04)	0.4 (0.016) ±0.1 (0.04)				
t ₁	Top tape thickness	0.1 (0.004) max					



 Web www.knowlescapacitors.com
 © Knowles 2025
 StandardC0GMLCCDatasheet
 Issue 2 (18/06/2025)

Page 7 of 8

Packing Information

Missing Components

The number of missing components in the tape may not exceed 0.25% of the total quantity with not more than three consecutive components missing. This must be followed by at least six properly placed components

Identification

Each reel is labelled with the following information: manufacturer, chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.

Component Orientation

Tape and reeling is in accordance with IEC 60286 part 3, which defines the packaging specifications for leadless components on continuous tapes.

Notes: 1) IEC60286-3 states A0 < B0

2) Regarding the orientation of 1825 and 2225 components, the termination bands are right to left, NOT front to back. Please see diagram.

COMPONENTS

START


LEADER 400mm min.

Orientation of 1825 & 2225 components

Outer Packaging

Outer carton dimensions mm (inches) max

Reel Size	No. of Reels	L	W	Т
178	1	185	185	25
(7)		(7.28)	(7.28)	(0.98)
178	4	190	195	75
(7)		(7.48)	(7.76)	(2.95)
330	1	335	335	25
(13)		(13.19)	(13.19)	(0.98)



Reel Quantities

Chip Size		0402	0505	0603	0805	1111	1206	1210	1210*	1410	1808	1812	1825	2211	2215	2220	2225
May Chin Thickness		0.5mm	1.3mm	0.8mm	1.3mm	2.0mm	1.6mm	2.0mm	6.0mm	2.0mm	2.0mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
Max. Chip Thickness	illickiless	0.02"	0.05"	0.03"	0.05"	0.08"	0.06"	0.08"	0.24"	0.08"	0.08"	0.1"	0.1"	0.1"	0.1"	0.1"	0.1"
178mm Reel (7")		10000	2500	4000	3000	1000	2500	2000	300	2000	1500	500	500	750	500	500	500
Quantities	330mm (13")	15000	10000	16000	12000	5000	10000	8000	1200	8000	6000	2000	2000	2000	2000	2000	2000

Leader Trailer

TRAILER

END


1210* VM2 parts only

Bulk Packing - Tubs

Chips are supplied in rigid re-sealable plastic tubs together with impact cushioning wadding. Tubs are labelled with the details: chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.

Dimensions mm (inches)

Н	60mm (2.36")
D	50mm (1.97")



Page 8 of 8



 Web www.knowlescapacitors.com
 © Knowles 2025
 StandardC0GMLCCDatasheet
 Issue 2 (18/06/2025)